

# Ekodeck® Screening

## TECHNICAL SPECIFICATIONS


### Colours



Greystone



Leatherwood



Riverbank Red



Alpine Ash

### Screening Boards

| COLOUR  | SIZE         | ITEM NO | PROFILE   |
|---|--------------|---------|---|
|  Greystone     | 67×15×2700mm | 0120984 |  |
|  Leatherwood   | 67×15×2700mm | 0327647 |  |
|  Riverbank Red | 67×15×2700mm | 0327648 |  |
|  Alpine Ash    | 67×15×2700mm | 0327644 |  |

### GAPS & SPANS


|  |        |
|--|--------|
| Centre-to-centre post spacing (maximum span) | 900mm  |
| Minimum ground clearance                     | 20mm   |
| Minimum side-to-side gap                     | 2mm    |
| Minimum end gap                              | 1-3mm* |
| Minimum distance from edge for fastening     | 15mm   |

\*Gap distances vary depending on temperature during installation. Refer to the Installation Guide for more information.

### FIXINGS

|              |  |
|--------------|--|
| Pre-drill    | Required   |
| Timber Posts | Stainless steel 8g x 40mm countersunk screws                   |
| Steel Posts  | High quality 8g x 30mm button head screws (suitable for steel) |

### DRESSED ALL ROUND

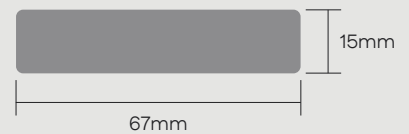

### FIX EITHER SIDE

