GLOBAL GREEN TAG CERTIFIED

trust brands™

EKODECK®

Designed to live on



Available at BUNNINGS warehouse

SUMMIT SERIES | FAIRHAVEN

Designed smarter. So you can live outdoors for longer.

Ekodeck looks and feels like natural timber, but never requires any oiling, sanding or sealing - giving you a freshly finished look all year round.

Tested & Built To Last

Easy To Maintain

30 YRS

Up-to 30 Year Warranty



DESIGNER SERIES | LEATHERWOOD

Why Ekodeck®?

Australian Owned & Designed
Our products are specially developed to withstand Australia's harsh weather conditions.

Fully Compliant
All our boards are fully compliant with the National Construction Code and the Building Code of Australia.

Reclaimed & Recycled
Created using recycled base materials that reduces landfill and uses both waste timber and plastics to produce our products.

Built to Last
All Ekodeck products are built to last longer and remain colourfast, with no rotting, warping or splintering.

Easy to Maintain
Install then relax and enjoy your outdoor space without ongoing sanding, oiling or painting.

Easy to Install
Faster and simpler to install compared to other decking alternatives.

Ekodeck® vs Timber

Wondering how Ekodeck compares to timber?
We've put together this summary table to help explain the key differences.

	TIMBER	EKODECK
Doesn't require regular oiling/sealing maintenance	×	✓
Naturally resistant to rot, decay and termites	×	✓
Concealed fixings	Limited options	✓
Anti-slip rated	×	✓
UV Stabilised	×	✓
Built to remain colourfast	×	✓
Won't splinter, cup, twist or warp	×	✓
Straight and consistent lengths	×	✓
Won't leach tannins	×	✓
Up to 30-year warranty	×	✓
Janka rating (measure of hardness and durability)	8.6 (Merbau)	10.8


Essentials vs Designer - The Differences

Ekodeck Decking - Essentials and Designer Series.
Each have their own unique attributes.
Choose the style most suitable for you.

Ekodeck® Decking / Essentials

GROOVED PROFILE

Install with QUICKFIX by Ekodeck®

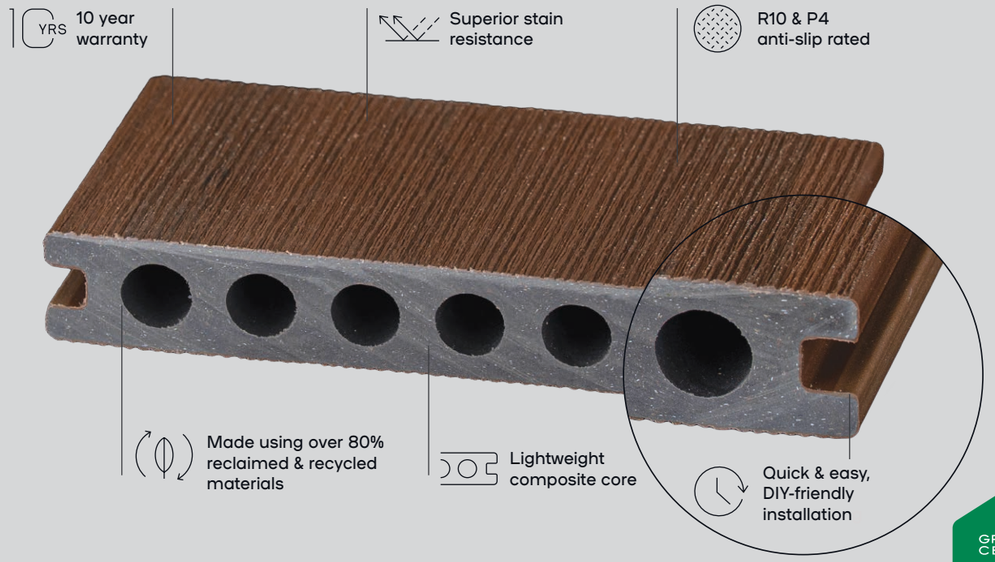

GLOBAL GREEN TAG CERTIFIED
GreenRate | Level C
trust brands


Ekodeck® Decking / Designer Series

GROOVED PROFILE

Install with QUICKFIX by Ekodeck®

Bushfire Rated option available:

Ekodeck® Decking
Flame Fighter

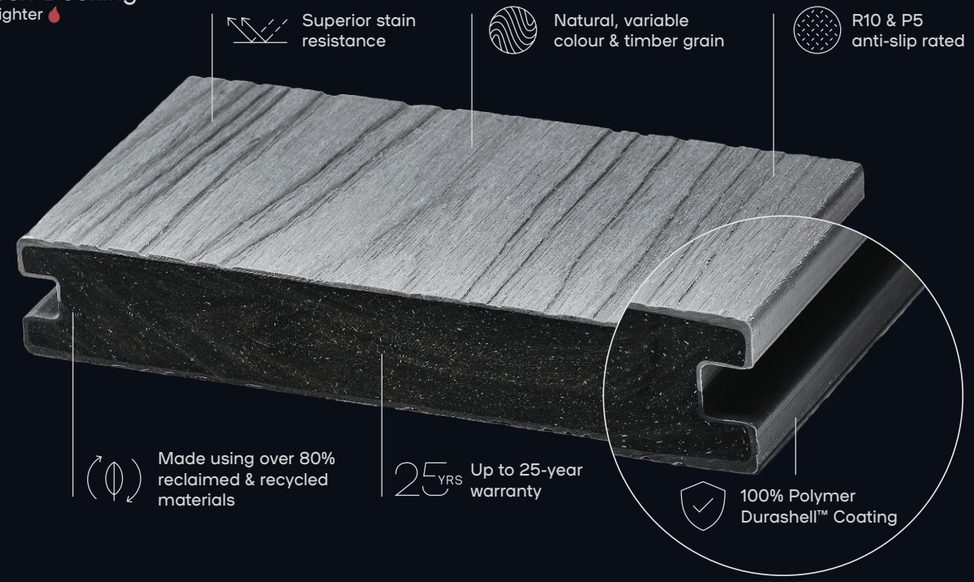

trust brands

Ekodeck®
Decking Styles

GET A SAMPLE KIT AT
EKODECK.COM.AU

Summit Series

180 × 23 × 5400mm


Fairhaven


Stirling

Designer Series

137 × 23 × 5400mm


Backbeach


Leatherwood


Estate Brown


Riverbank Red


Ironwood


Alpine Ash

Essentials

137 × 23 × 5400mm


Stockman Brown


Jackaroo Red


Nightfall


Moonlight

Classic


137 × 23 × 5400mm


Dark Brown


Red Rock


Greystone

Refer to actual product sample
for true colour representation

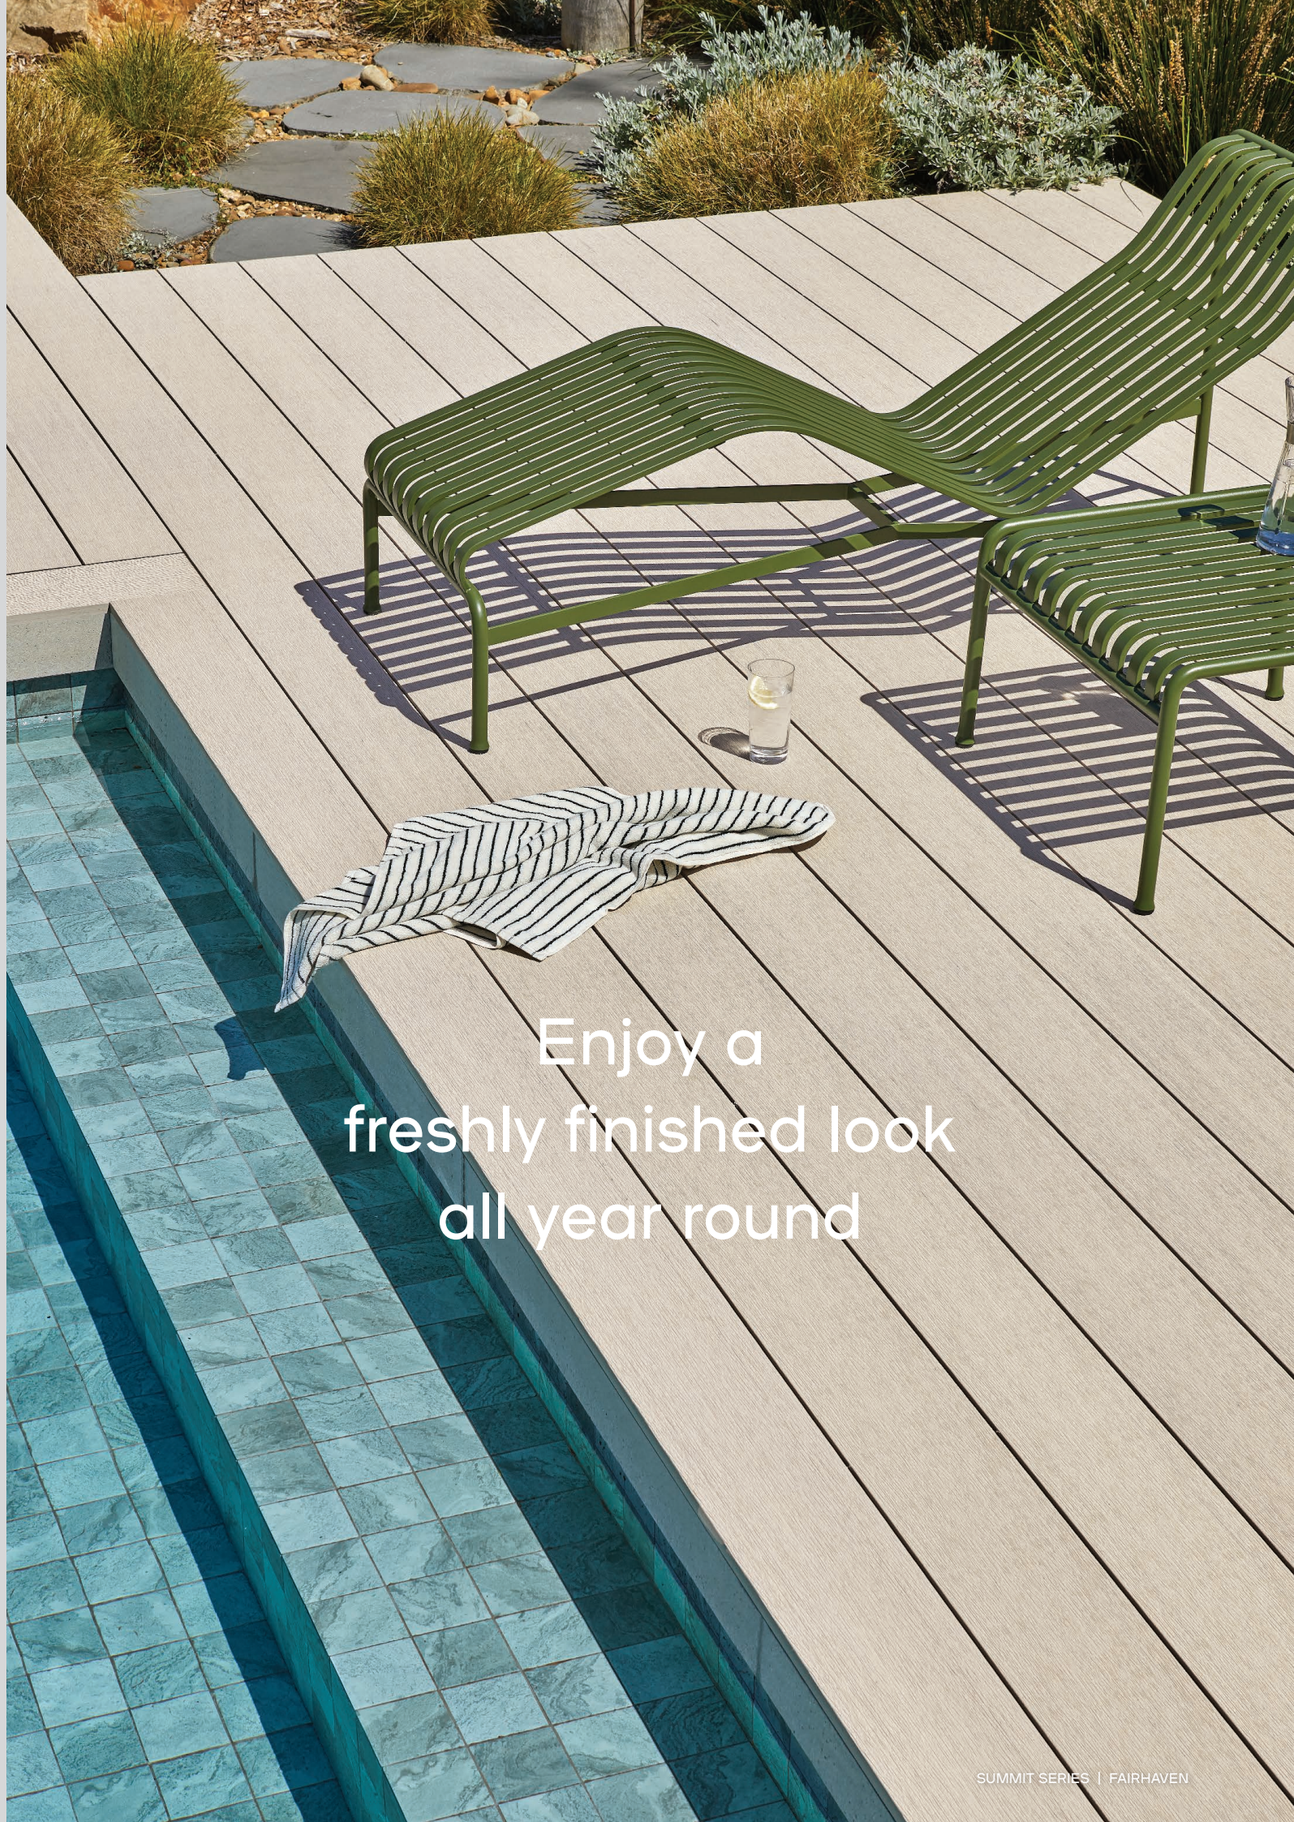

Designed to live on and on...

DESIGNER SERIES | BACKBEACH




SUMMIT SERIES | FAIRHAVEN

Ekodeck® Decking
Summit Series 19

Ekodeck® Summit Series offers an extra-wide 180mm board in two subtle, coastal colours, perfect for your Hampton's style home. The soft tonal varation across the wide profile make it a design feature, blurring the lines between indoor and outdoor living. With a certified BAL19 bushfire rating and best-in-class strength characteristics, Ekodeck® Summit Series can be used in a wide variety of applications, without compromising compliance. Boasting an industry leading 30 year residential warranty, you can rest assured it's made to go the distance.

- Wider 180mm Board
- Certified Bushfire Rating (BAL19)*
- Up-to 30 Year Warranty
- Over 80% Reclaimed & Recycled Materials
- Superior Stain Resistance
- Anti-slip Rated R10 & P5

*AS1530.8.1 BAL-19 testing and compliance certification available at ekodeck.com.au.



Colours & Size

COLOUR	SIZE	ITEM NO
Fairhaven	180×23×5400mm	0622679
Stirling	180×23×5400mm	0622679

Edge Boards


COLOUR	SIZE	ITEM NO
Fairhaven	180×23×5400mm	0622677
Stirling	180×23×5400mm	0622680

Span & Clearance

	Uniformly Distributed Actions	Concentrated Actions	Centre-to-centre joist spacing
Residential*	2.0kPa	1.8kN	500mm
Residential stairs & landings*	2.0kPa	2.7kN	480mm
Commercial*	4.0kPa	2.7kN	480mm
Min ground clearance (with adequate drainage)			40mm
Min ground clearance (without adequate drainage)			90mm

*As per AS/NZS 1170.1. Visit ekodeck.com.au for engineering and compliance certificates and for more information on spans, loads and Residential and Commercial applications.

Edge Board Installation

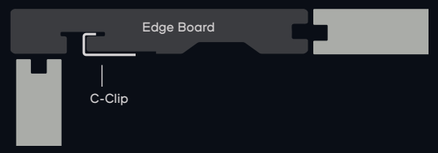



SUMMIT SERIES | STIRLING



GLOBAL GREEN TAG CERTIFIED
GreenRate | Level C
trust brands™

CodeMark Australia
Certificate CM40388
CMI CERTIFICATION


Ekodeck® Decking
Designer Series 19

Ekodeck® Designer Series Decking features our Durashell™ coating, which provides superior stain resistance, a wide range of natural timber tones, as well as an extended warranty of up to 25 years. The high-end finish of the Designer Series boards mimics the subtle nuances of natural timber, minus the upkeep. With a certified BAL19 bushfire rating, nationally recognised compliance with a CodeMark® certificate and a Global GreenTagCert™ GreenRate™ Level C certification makes the Designer Series range the go-to choice for composite decking Australia-wide.

- Variable Timber Grain Look
- Certified Bushfire Rating (BAL19)*
- 25 YRS Up-to 25 Year Warranty
- Over 80% Reclaimed & Recycled Materials
- Superior Stain Resistance
- Anti-slip Rated R10 & P5

*AS1530.8.1 BAL-19 testing and compliance certification available at ekodeck.com.au.

Edge Board Installation

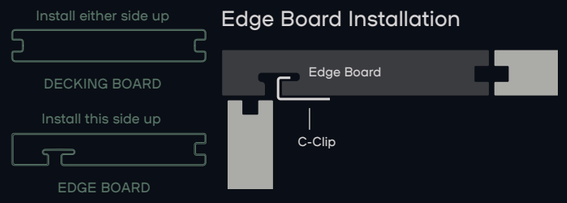

Colours & Size

COLOUR	SIZE	ITEM NO
Backbeach	137×23×5400mm	0109382
Leatherwood	137×23×5400mm	0109382
Riverbank Red	137×23×5400mm	0109383
Estate Brown	137×23×5400mm	0109383
Alpine Ash	137×23×5400mm	0109384
Ironwood	137×23×5400mm	0109384

Edge Boards

COLOUR	SIZE	ITEM NO
Backbeach	137×23×5400mm	0200711
Leatherwood	137×23×5400mm	0200714
Riverbank Red	137×23×5400mm	0200715
Estate Brown	137×23×5400mm	0200712
Alpine Ash	137×23×5400mm	0200710
Ironwood	137×23×5400mm	0200713

Span & Clearance

	Uniformly Distributed Actions	Concentrated Actions	Centre-to-centre joist spacing
Residential*	2.0kPa	1.8kN	450mm
Residential stairs & landings*	2.0kPa	2.7kN	400mm
Commercial*	4.0kPa	2.7kN	400mm
Min ground clearance (with adequate drainage)			40mm
Min ground clearance (without adequate drainage)			90mm

*As per AS/NZS 1170.1. Visit ekodeck.com.au for engineering and compliance certificates and for more information on spans, loads and Residential and Commercial applications.





GLOBAL GREEN TAG CERTIFIED
GreenRate | Level C
trust brands™

Ekodeck® Decking
Classic

Tried and tested in the harsh Australian climate since 2009, our Classic range of Ekodeck® Decking has proven itself over the years to be the colourfast, dependable choice for commercial projects and DIYers alike. With a reputation of performance, the Classic range of Ekodeck® Decking is the same colour and consistency all the way through, allowing ultimate workability. Made from 47% reclaimed timber and 43% recycled HDPE plastic, Ekodeck® Classic carries a Global GreenTag^{CertTM} GreenRate^{TM} Level C certification, making it the smart timber alternative Australia-wide.

- UV Stabilised
- 15 YRS 15 Year Warranty
- Over 90% Reclaimed & Recycled Materials
- Easily Repairable by Sanding
- Won't Splinter Cup or Twist
- Anti-slip Rated R11 & P5

Install this side up



Colours & Size

COLOUR	SIZE	ITEM NO
Red Rock	137×23×5400mm	0121077
Dark Brown	137×23×5400mm	0121078
Greystone	137×23×5400mm	0121079

Span & Clearance


	Uniformly Distributed Actions	Concentrated Actions	Centre-to-centre joist spacing
Residential*	2.0kPa	1.8kN	450mm
Residential stairs & landings*	2.0kPa	2.7kN	400mm
Commercial*	4.0kPa	2.7kN	400mm
Min ground clearance (with adequate drainage)			40mm
Min ground clearance (without adequate drainage)			90mm

*As per AS/NZS 1170.1. Visit ekodeck.com.au for engineering and compliance certificates and for more information on spans, loads and Residential and Commercial applications.

Edge Board Finishing

Easily make an edge board with our Classic range of Ekodeck Decking.

1. Rip the groove off the board using a circular saw
2. Refinish the edge with some 40g sandpaper

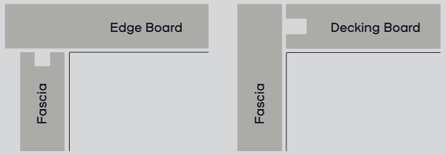



Ekodeck® Decking
Essentials

Level up your outdoor area - Ekodeck® Essentials features a tough Durashell™ capping that protects against fading, moisture and stains, with a lightweight composite core. Take back your weekends and spend your time enjoying your decking, not maintaining it. Available in four modern colours and backed by a 10-year warranty, Ekodeck® Essentials is where value meets performance. This DIY-friendly, easy to install composite decking is the smart choice for families wanting long-lasting style without the fuss.

- Equipped with Durashell™ Coating
- 10 YRS 10 Year Warranty
- Over 80% Reclaimed & Recycled Materials
- UV Stabilised
- Won't Splinter Cup or Twist
- Anti-slip Rated R10 & P4

Install either side up



Colours & Size

COLOUR	SIZE	ITEM NO
Jackaroo Red	137×23×5400mm	0650064
Stockman Brown	137×23×5400mm	0650064
Nightfall	137×23×5400mm	0650065
Moonlight	137×23×5400mm	0650065


Span & Clearance

	Uniformly Distributed Actions	Concentrated Actions	Centre-to-centre joist spacing
Residential*	2.0kPa	1.8kN	400mm
Residential stairs & landings*	2.0kPa	2.7kN	350mm
Commercial*	4.0kPa	2.7kN	350mm
Min ground clearance (with adequate drainage)			100mm
Min ground clearance (without adequate drainage)			300mm

*As per AS/NZS 1170.1. Visit ekodeck.com.au for engineering and compliance certificates and for more information on spans, loads and Residential and Commercial applications.

Edge Board Finishing

To make your own edge board cut both the decking board and fascia board as shown below to create a shadowline finish.

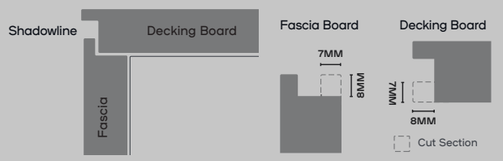



CODEMARK® Australia
Certificate CM40388

CMI CERTIFICATION

Ekodeck® Decking
Flame Fighter

Designed and developed specifically for use in bushfire prone areas, our Flame Fighter™ range of Ekodeck® Decking carries a certified BAL29 (Bushfire Attack Level) rating as per AS1530.8.1 (2018). Don't compromise on compliance - rigorous testing and CodeMark® certification ensures compliance with the NCC and BCA, making Ekodeck® Flame Fighter boards the go-to timber alternative when building in bushfire-prone areas.

- Certified Bushfire Rating (BAL29)*
- Up-to 25 Year Warranty
- Over 80% Reclaimed & Recycled Materials
- Superior Stain Resistance
- Variable Timber Grain Look
- Anti-slip Rated R10 & P5

*AS1530.8.1 BAL-29 testing and compliance certification available at ekodeck.com.au.

Keep in mind

There is a colour difference between Flame Fighter and Designer Series boards. Do not mix these boards in the same installation as colour variation may increase over time.

Install either side up



Colours & Size

COLOUR	SIZE	ITEM NO
Sand Dune	137×23×5400mm	0123642
Honey Oak	137×23×5400mm	0123642
Redgum	137×23×5400mm	0123643
Deep Walnut	137×23×5400mm	0123643
Snow Gum	137×23×5400mm	0123641
Shadow Grey	137×23×5400mm	0123641


Span & Clearance

	Uniformly Distributed Actions	Concentrated Actions	Centre-to-centre joist spacing
Residential*	2.0kPa	1.8kN	450mm
Residential stairs & landings*	2.0kPa	2.7kN	400mm
Commercial*	4.0kPa	2.7kN	400mm
Min ground clearance (with adequate drainage)			40mm
Min ground clearance (without adequate drainage)			90mm

*As per AS/NZS 1170.1. Visit ekodeck.com.au for engineering and compliance certificates and for more information on spans, loads and Residential and Commercial applications.

Edge Board Finishing

To finish your edge board and achieve a clean finish, simply route your boards as shown below:






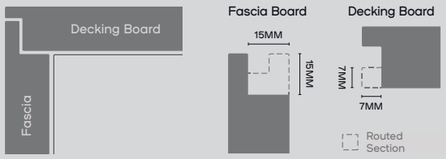




QUICKFIX
by Ekodeck®

Designed specifically for Ekodeck® Decking, Quickfix has made installing your deck easier and faster than ever. Using a simple clip system, the boards are automatically spaced ensuring DIY-friendly installation and at least 30% faster installation time. Available in both 3mm or 6mm board spacing options to suit timber or metal joists, all Quickfix systems are compatible with any style of Ekodeck® Decking. The quick and easy clipping system leaves you with a clean, modern finish free from screws. Our Quickfix kits come with everything you need to put down your Ekodeck® Decking from start to finish.

- At Least 30% Faster to Lay
- Easy Installation
- No Surface Screws
- No Hole Marking
- Auto Gapping
- No Counter Sinking

CLIP TYPE		Board Spacing 3MM GAPS	6MM GAPS
STANDARD CLIP	Standard clips go on every joist, except for where a locking clip is placed. They automatically gap and secure the decking boards.		
LOCKING CLIP	Use 1 Locking Clip at the centre joist of each board. Locking Clips stop the boards from shifting.		
C-CLIPS	This versatile clip can be used to secure the first board of your deck as well as support fascias or install breaker boards.		



QUICKFIX | STANDARD CLIP 6MM

Quickfix Range

ITEM	BOARD SPACING	COVERAGE	JOIST MATERIAL	ITEM NO
Quickfix Kit	6mm	100lm	Timber	0089490
Quickfix Kit	6mm	350lm	Timber	0089491
Quickfix Kit	6mm	100lm	Metal	0089493
Quickfix Kit	3mm	100lm	Timber	0130268
Quickfix Kit	3mm	100lm	Metal	0481514
Standard Clips	6mm	15pc	Timber/Metal	0481513
Standard Clips	3mm	15pc	Timber/Metal	0481512
Locking Clips	6mm	10pc	Timber/Metal	0089494
Locking Clips	3mm	10pc	Timber/Metal	0339838
C-Clips	3/6mm	15pc	Timber/Metal	0339836

To find compatible products look for the Quickfix logo

Install with QUICKFIX by Ekodeck®

Introducing Quickfix - our fixing system designed specifically for Ekodeck® Decking boards.

Quickfix is a simple, auto-spacing clip system making it easier and faster to install your Ekodeck® Decking. Install with Quickfix to achieve a clean, modern finish free from screws. Perfect for tradespeople and weekend warriors alike.

QUICKFIX | STANDARD CLIP 3MM



SHIPLAP CLADDING | CARBON

CodeMark® Australia
Certificate CM40387

CMI CERTIFICATION

Ekodeck® Cladding
Shiplap

Ekodeck® Shiplap Cladding system is a revolutionary pre-finished composite cladding solution with no ongoing painting or sealing needed.

CodeMark® Certified and fully compliant with the National Construction Code, the Ekodeck® Shiplap Cladding system utilises a quick and easy self-supporting clip installation method and is backed by an industry-leading 25-year warranty for both residential and commercial applications.

Say goodbye to patching, sanding or painting - as soon as the last screw is in, the job is done.

Can be installed either horizontally or vertically.
Each board provides 150mm of coverage once installed.

- No Oiling, Painting or Sealing
- 25 YRS 25 Year Warranty
- Over 80% Reclaimed & Recycled Materials
- CodeMark Certified
- Equipped with Durashell™ Coating
- UV Stabilised

Colours & Size

COLOUR	SIZE	ITEM NO
Carbon	164×13.5×5400mm	0617437
Hazelwood	164×13.5×5400mm	0617436
Lighthouse	164×13.5×5400mm	0680667

J-Channels

COLOUR	SIZE	ITEM NO
Carbon	60×27×2700mm	0617438
Hazelwood	60×27×2700mm	0617435
Lighthouse	60×27×2700mm	0680670

Cladding Clips

COLOUR	SIZE	ITEM NO
Aluminium	250 Pack	0643235

System Components



SHIPLAP CLADDING J-CHANNEL CLADDING CLIP

SHIPLAP CLADDING & CASTELLATED PANEL | HAZELWOOD

Fast to Install

Easy to Maintain

Designed to Last

Ekodeck® Castellated Panel

With a sleek, modern design, Ekodeck® Castellated Panels give your space a sophisticated look and feel.
A timeless decorative batten cladding panel that is perfect for a fence lining over existing fencing, the tongue and groove profile makes installation quick and easy for even a beginner DIYer. Ekodeck® Castellated Panels can also be used in a variety of applications, including a full block-out screen, an outdoor feature wall or even ceiling lining, your imagination is the limit.

- Equipped with Durashell™ Coating
- No Oiling, Painting or Sealing
- Over 80% Reclaimed & Recycled Materials
- Easy to Install
- Variable Colour, Timber Grain Look
- Does Not Leach Tannins

Colours & Size

COLOUR	SIZE	ITEM NO
Hazelwood	219×26×3600mm	0488950
Carbon	219×26×3600mm	0488949
Lighthouse	219×26×3600mm	0925128

Span & Clearance

Centre-to-centre support spacing (max)*	600mm
Min ground clearance	20mm
Max unsupported overhang	150mm
Coverage	200mm

*Visit our website for more information on gaps and fixing specifications.



Tongue & groove hidden profile



CASTELLATED PANEL | HAZELWOOD

Ekodeck® Screening

Boasting a traditional screening profile in four great colours, Ekodeck® Screening is the perfect timber alternative. Without the need to oil, paint or seal like traditional timber screening, you can install and forget, knowing your Ekodeck® Screening will look good for years to come.

- No Oiling, Painting or Sealing
- UV Stabilised - Won't Fade to Grey
- **Rot, Decay & Termite Resistant**
- Does Not Leach Tannins



Install either side

Dressed all round

Colours & Size

COLOUR	SIZE	ITEM NO
Greystone	67×15×2700mm	0120984
Alpine Ash	67×15×2700mm	0327644
Leatherwood	67×15×2700mm	0327647
Riverbank Red	67×15×2700mm	0327648

Span & Clearance

Centre-to-centre post spacing (max)*	900mm
Min ground clearance	20mm

*Visit our website for more information on gaps and fixing specifications.

Fixing Information

	TIMBER POSTS	STEEL POSTS
RECOMMENDED SCREWS	Stainless Steel	Galvanised
GAUGE	8g	8g
LENGTH	40mm	30mm
PRE-DRILL	✓	✓

FIND US ON
globalgreentag
.com

Buying Ekodeck

Ekodeck is available through your local
Bunnings Warehouse.
Contact your local Bunnings Trade Desk
for pricing and availability.

EKODECK® | Available at BUNNINGS warehouse

Phone 1300 867 917
Email info@ekodeck.com.au

Unit 6 11 Sabre Drive
Port Melbourne VIC 3207

ekodeck.com.au
v4.26